

# PRODUCT DATA SHEET

## Ansell Lighting AEFRD/IP65/MW




### Edge GU10 IP65 Fire Rated Downlight Matt White

Manufacturer: Ansell Lighting

GTIN: 5056144216161

Family: [Display]

Range: Edge GU10 IP65 Fire Rated

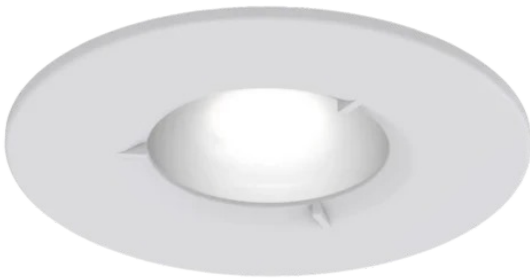

## DESCRIPTION

Compact Fire Rated IP65 GU10 LED downlight (less lamp) for shallow ceiling voids, protective polycarbonate spring clip cover for easy install, extra-large terminals for fast loop-in/loop-out wiring and an ultra-slim bezel. OCTO Connected by WiZ GU10 lamp options. Ideal for residential and hospitality.

- Compact Fire Rated downlight for shallow ceiling voids suitable for residential and hospitality applications (product supplied less lamp)
- Suitable for standard GU10 halogen or LED lamps
- IP65 ingress protection allows a range of installation options
- Protective sheathing spring clips for ceiling protection and ease of installation
- Push fit terminals for fast loop-in, loop-out wiring
- Fully tested for 30, 60 and 90 minute ceiling types to meet Part B of Building Regulations
- Twistlock lamp retaining ring for ease of lamp replacement
- Ultra-slim bezel profile

## TECHNICAL SPECIFICATION

**ETIM Class: Downlight / spot luminaire / floodlight (EC001744)**



### Primary Features

|                       |       |                          |    |
|-----------------------|-------|--------------------------|----|
| Housing colour        | White | Maximum system power (W) | 50 |
| Lamp cap/base         | GU10  | Number of lamps          | 1  |
| Light source included | No    |                          |    |

### Additional Features

|                                         |                |                                 |     |
|-----------------------------------------|----------------|---------------------------------|-----|
| Adjustability                           | Not adjustable | Suitable for recessed mounting  | Yes |
| Height/depth (mm)                       | 105            | Suitable for surface mounting   | No  |
| Outer diameter (mm)                     | 90             | Suitable for suspended mounting | No  |
| Protection class according to IEC 61140 | I              | Suitable for traverse mounting  | No  |
| Suitable for ceiling mounting           | Yes            | Suitable for wall mounting      | No  |
| Suitable for light-track mounting       | No             | With light sensor               | No  |
| Suitable for pedestal/floor mounting    | No             | With movement sensor            | No  |

## FURTHER DETAILS

Product Status (at download): Active

Date Updated: 15-07-2025

Trade Tariff Commodity Code: 9405199090

Country of Origin: CN

Ansell Lighting, Unit 6B Stonecross Industrial Park, Yew Tree Way, Warrington, WA3 3JD

☎ 01942 433 333

✉ saleswarrington@anselluk.com

🌐 <http://www.anselluk.com>

### Disclaimer

- This Data Sheet was downloaded from EDATA - [www.edata.org.uk](http://www.edata.org.uk) - the UK electrotechnical industry data pool managed by EDA Data Services Limited on behalf of the Electrical Distributors' Association, on 17/11/2025.
- All intellectual property rights in the Product Data shown in this Data Sheet remains at all times the property of the Manufacturer named on the Data Sheet
- Product Data shown on the Data Sheet is for the product as supplied by the Manufacturer. Any subsequent modification of the product may affect specification and performance.
- Every reasonable effort is made to ensure accuracy of the Product Data which is believed to be correct at the date of download from EDATA. However neither the Manufacturer, the Wholesaler who downloaded the Data Sheet, nor EDA Data Services warrant the accuracy of the Product Data.
- The Product Data shown on the Data Sheet is not contractually binding. The Manufacturer reserves the right to amend the Product Data without prior notice.